

WALL


## ARTFRAME

The ArtFrame is created using a silicone edge graphic, which is a printed fabric with a thin silicone band sewn around its edges. This silicone edge fits into a groove in the frame, stretching the fabric smooth for an upscale, frameless look. ArtFrames incorporate 9mm ArtFelt within the frame, behind the fabric graphic. This design ensures excellent sound modulation and delivers high-resolution graphics that can be easily replaced for an updated look.



# SILHOUETTES

ArtFrames are available in a minimum size of 24" x 24" and can be cut to meet your specifications. The fabric is custom printed with a design of your choosing, providing you creative freedom! The frames are available in standard colors of black and anodized silver, or can be powder-coated to match any color.

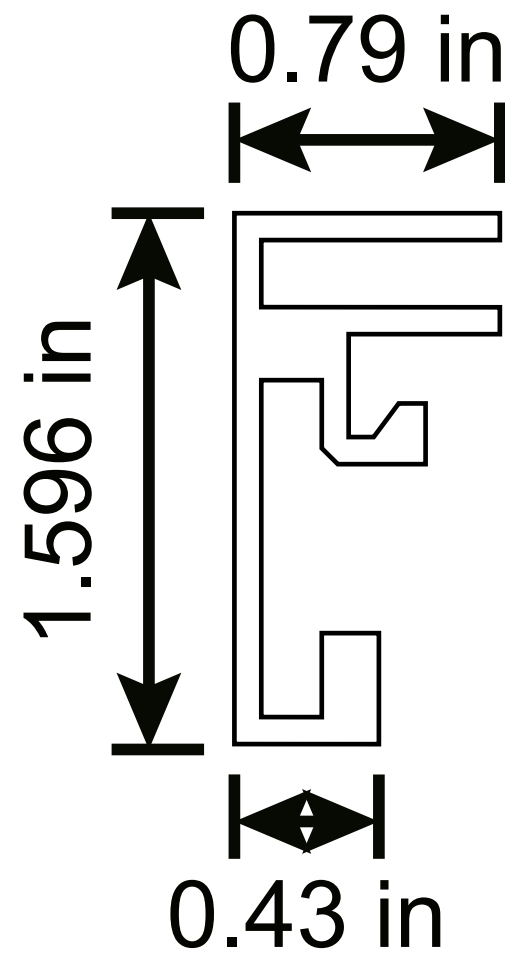

ANODIZED SILVER



BLACK



CUSTOM POWDER  
COAT TO MATCH  
ANY PMS COLOR

**FRAME COLORS**

Anodized Silver, Black, & Custom Powder coat to match any PMS Color

**MATERIAL**

Aluminum

**MINIMUM SIZE**

24" x 24"

**WARRANTY**

5 Year Limited Warranty

**LEAD TIME**

3-5 weeks for Standard, Request Lead Time for Custom

Dye sublimation prints are sensitive to prolonged exposure to direct sunlight and UV radiation. For optimal longevity and vibrancy, avoid placing the prints in areas where they will be regularly exposed to these elements.




# COLOR GUIDE

9mm ArtFelt is the core material in our signature line of acoustic solutions. The ArtFelt within the ArtFrame is covered with fabric. However, if you ever wish to remove the fabric, it would be beneficial to choose an ArtFelt color that flows nicely in your space and within your frame.


Order Samples to verify color as printers and monitors vary.




ECLIPSE



ASH



WEATHERED




GREYSTONE



MIST



CRYSTAL




ESPRESSO



MOSS




SPRING




SAGE




CASTLEWALL




GRAPHITE



VINTAGE INDIGO




INDIGO




GLACIER




LAGOON



TROPICAL



MYSTIC



GRAPE




SEASHELL




MOCHA



SANDSTONE



STONE



GALVANIZED



CARDINAL



CITRUS




TANGERINE




SOLAR



LEMON



WALNUT



CEDAR



MAPLE



DRIFTWOOD

# HOW TO SPECIFY

Whether you have a specific product in mind or desire to craft a fully customized soundscape, our team is ready to bring your vision to life!

1

## CHOOSE YOUR SOUND SOLUTION

Looking to elevate how you address sound mitigation in your space? Explore our range of wall, ceiling, and screen solutions to begin shaping your ideal soundscape.

2

## REFINE THE DESIGN

Once you've selected your application and product, it's time to refine the design. Dive into our array of silhouettes, textures, patterns, and colors to customize your creation.

3

## SHARE YOUR VISION

Whether you already have a product and design in mind or require a fully custom solution, reach out to an ARTIZIN specialist or fill out the quote form on our website. A team member will walk you through each step of the process.

4

## GIVE US THE LOWDOWN


It's beneficial if you can provide our team with architectural drawings, field measurements, design inspiration, or design intent.




# INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you've crafted.

## SEG FRAME ASSEMBLY

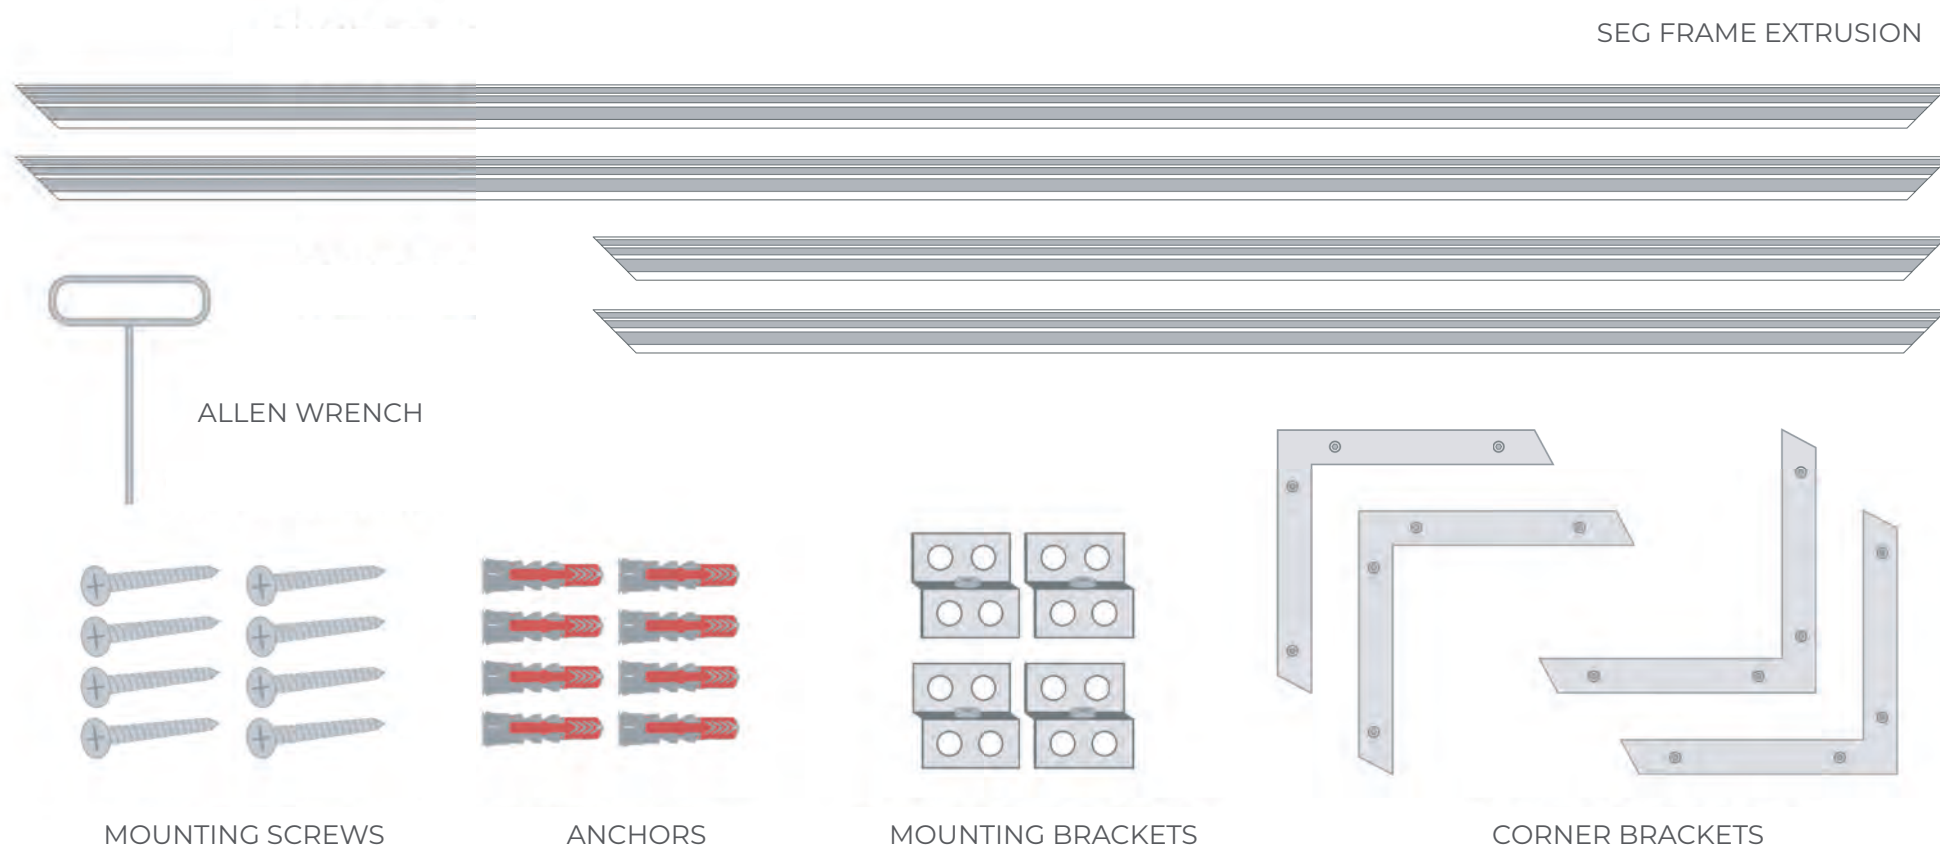

## SEG INSTALLATION

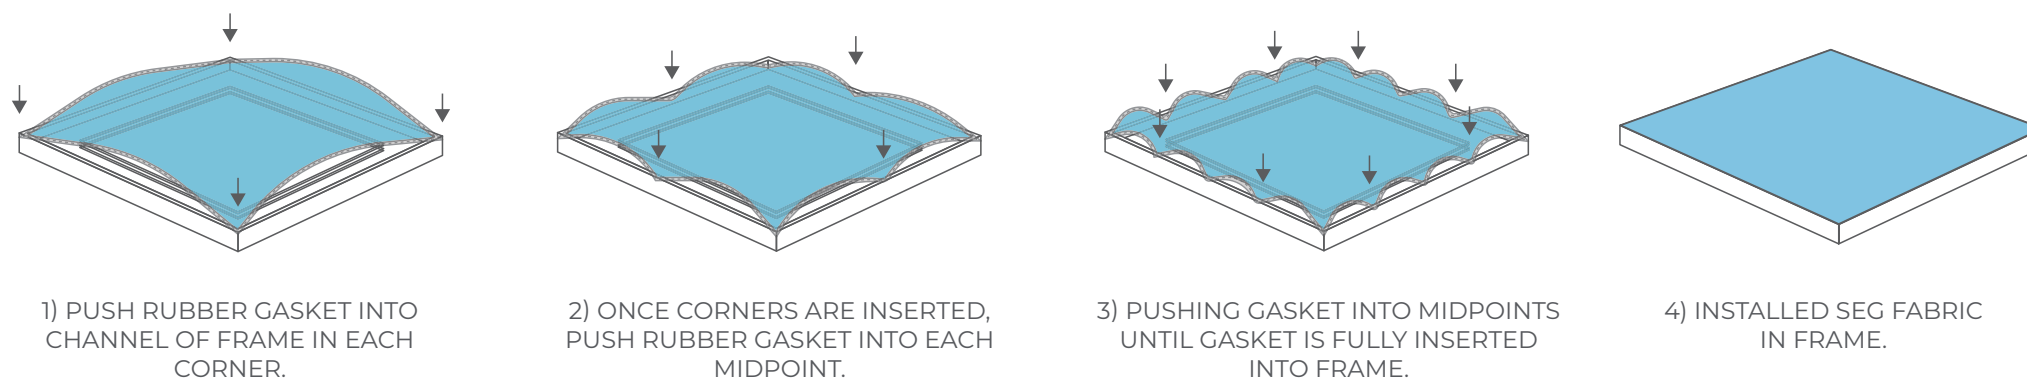


# INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you've crafted.


## SEG FRAME ASSEMBLY




1) LAY OUT THE FRAME PIECES WITH FLAT SIDE DOWN, IN SHAPE OF FINISHED FRAME.

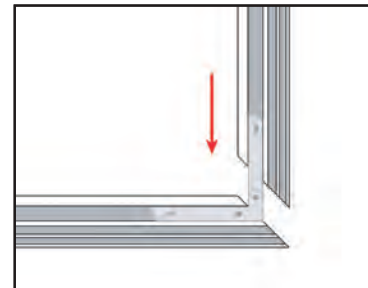

2) INSERT CORNER BRACKET INTO INNER CHANNEL OF FRAME TO FORM A 90 DEGREE ANGLE. REPEAT PROCESS FOR ALL FOR CORNERS.

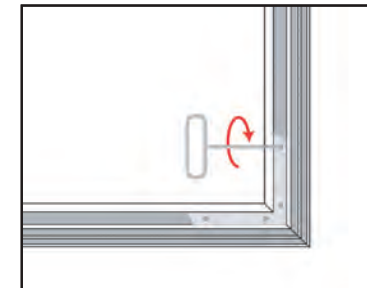

3) TIGHTEN SCREWS TO SECURE CONNECTION IN ALL FOUR CORNERS, COMPLETELY TIGHTEN SET SCREWS TO SECURE FRAME TOGETHER.

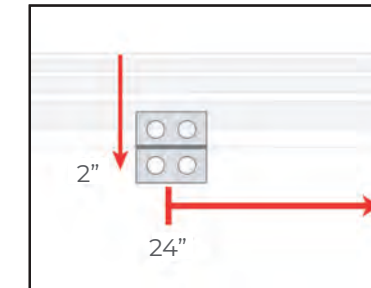


4) PLACE MOUNTING BRACKET ON WALL 2" BELOW WHERE YOU WANT TOP OF FRAME. MARK TWO BOTTOM HOLES FOR DRILLING. REPEAT FOR SECOND MOUNTING BRACKET 24" FROM FIRST BRACKET.



5) USING MARKED LOCATIONS, DRILL MATCHING HOLES AT MARKS WITH A 3/16" DRILL BIT.




6) HAMMER WALL ANCHORS INTO WALL UNTIL THEY ARE FLUSH WITH DRYWALL OR MOUNTING SURFACE.

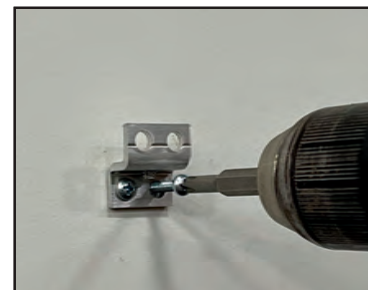

7) SCREW IN TWO TOP MOUNTING BRACKETS INTO THE ANCHORS WITH MOUNTING SCREWS.



8) HANG FRAME ON MOUNTING BRACKETS. CENTER IT ON TWO BRACKETS OR SLIGHTLY MOVE LEFT TO RIGHT TO GET FRAME WHERE IT IS NEEDED.

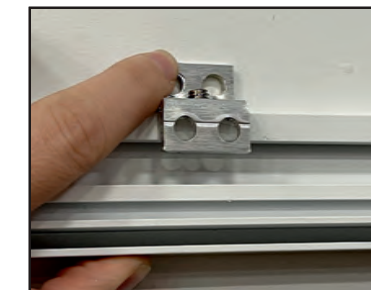

9) PLACE REMAINING TWO MOUNTING BRACKETS AS SHOWN ON BOTTOM RAIL OF FRAME. MARK WHERE MOUNTING SCREW HOLES ARE AND REPEAT STEPS 5-7.



10) ONCE FRAME IS LEVELED AND IN DESIRED PLACE, TIGHTEN ALL OF SET SCREWS WITH PROVIDED ALLEN WRENCH.

## PRODUCT SPECIFICATIONS

The details make all the difference. Dive into the specifics that contribute to the overall quality and functionality of our ArtFelt products.

<b>APPLICATION</b>	Wall
<b>MATERIAL</b>	9mm ArtFelt
<b>COMPOSITION</b>	60% Recycled Polyester Fiber, 40% Virgin Fiber
<b>DENSITY</b>	2000g/m <sup>2</sup>
<b>FORMALDEHYDE EMISSION</b>	0.00ug/g
<b>NRC RATING</b>	0.30-0.60
<b>FIRE TEST ASTM E 84-ISAN</b>	Class A
<b>SUSTAINABILITY</b>	Recyclable, Certified Clean Air Gold by Intertek Sustainability
<b>WARRANTY</b>	5 Year Limited Warranty
<b>SAFETY</b>	DECLARE, Red List Free
<b>LEAD TIME</b>	3-5 weeks for Standard, Request Lead Time for Custom

### GENERAL CARE

Vacuum as needed to remove dirt and dust. Use an air compressor for hard to reach areas.

### STAIN REMOVAL

Blot spills and spots immediately with a clean, soft white dry cloth (do not use paper products). Avoid using solvents or concentrated abrasives to clean ArtFelt. Always test in an inconspicuous area first.

### MILD STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mild solution of soap and warm water. Repeat using only clean water (no soap) to remove soap concentrate. Pat dry with a lint free cloth.

### CHALLENGING STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mixed solution of household bleach and water (70% bleach | 90% water). Repeat using only clean water (no bleach) to remove bleach concentration. Pat dry with a lint free cloth.



### CUSTOM

Connect with our team to design a fully custom solution. Through meticulous prototyping and the expertise of our skilled designers, we'll transform your vision into a tangible, personalized creation. Whether you're seeking intricate patterns, unique textures, or custom colors, we're here to translate ideas into inspired designs.